


FLAT THREE - CORE PVC INSULATED AND SHEATHED COPPER CABLES 300/500V

Type: NCYY F 3 - core
Identification: N: Standard cable type
 C: Copper conductor
 Y: PVC Insulation
 Y: PVC Sheath
 F: Flat wiring cable

Application: General wiring Installations to be fixed on SURFACE

SPECIFICATION: BS 6004 / 75

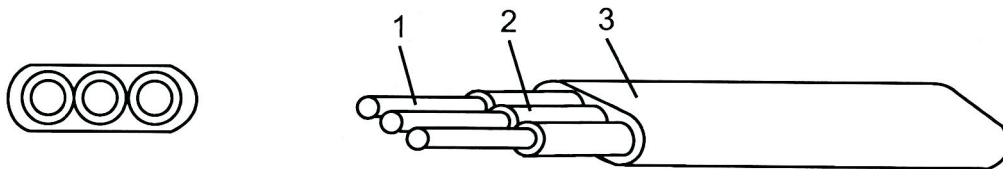

1. Copper conductor
2. PVC - insulation
3. PVC - outer sheath

Nominal Cross Sectional Area mm ²	Conductor number x diameter of wire mm	radial thickness of		Nominal Overall diameter		Maximum current rating A	Weigh kg/ standard length kg	Standard delivery length m	Delivery form
		insulat mm	sheath mm	minimum mm	Maximum mm				
1.0	1/1.13	0.6	0.9	8.4 x 4.0	9.8 x 4.7	11	6.9	100	Coil
1.5	1/1.38	0.7	0.9	9.8 x 4.4	11.5 x 5.4	15	9.3	100	Coil
2.5	1/1.78	0.8	1.0	11.5 x 5.2	13.5 x 6.2	21	14.0	100	Coil
4	1/2.25	0.8	1.1	13.5 x 5.8	16.5 x 7.4	28	19.7	100	Coil
6	1/2.76	0.8	1.1	15.0 x 6.4	18.0 x 8.0	35	26.4	100	Coil
10	7/1.35	1.0	1.2	19.0 x 7.8	22.5 x 9.6	47	45.1	100	Coil
16	7/1.70	1.0	1.3	22.0 x 9.0	26.5 x 11.0	62	33.0	50	Coil

Solid copper conductor up - to 6 mm²