


PVC INSULATED AND SHEATHED NON - ARMoured COPPER CONTROL MAINS CABLES 0.6/1kv WITH NUMBERED CORES

Type: NCYY/F -cc 2.5mm²
Identification: N: Standard Cable type
 C: Copper conductor
 Y: PVC Insulation
 Y: PVC Sheath
 cc: Control cable
Application: Indoor and Outdoor electricity supply

SPECIFICATION: VDE 0271

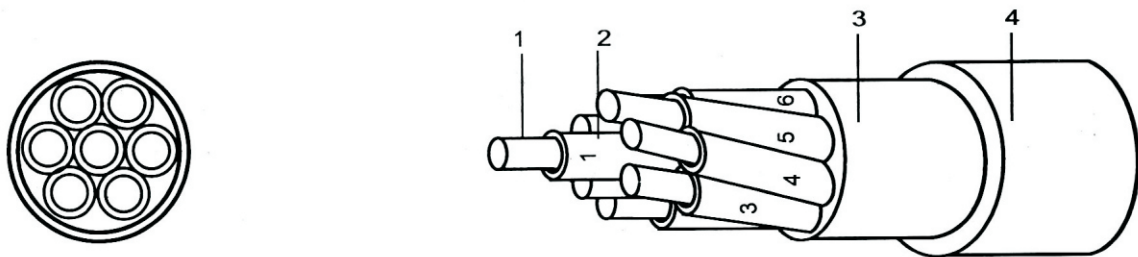

1. Copper conductor
2. PVC - insulation
3. PVC inner sheath
4. PVC-outer sheath

Nominal Cross Sectional Area mm ²	Conductor number x diameter of wire mm	Radial thickness of			Nominal Overall diameter mm	Maximum current rating A		Weigh kg/ standard length kg	Standard delivery length m	Delivery form drum
		insult mm	inner sheath mm	outer sheath mm		in ground	in air			
5 x 2.5	1/1.78	0.9	0.8	1.8	14.9	21	16	318	1000	R10
7 x 2.5	1/1.78	0.9	0.8	1.8	16.0	18	14	389	1000	R12
10 x 2.5	1/1.78	0.9	0.8	1.8	19.6	15	12	530	1000	R12
12 x 2.5	1/1.78	0.9	1.0	1.8	21.4	14	11	622	1000	R12
16 x 2.5	1/1.78	0.9	1.0	1.8	22.5	13	10	782	1000	R14
19 x 2.5	1/1.78	0.9	1.0	1.8	23.6	12	9	887	1000	R14
27 x 2.5	1/1.78	0.9	1.0	2.0	28.3	10	8	1229	1000	R16
33 x 2.5	1/1.78	0.9	1.0	2.0	30.1	10	8	1455	1000	R16
37 x 2.5	1/1.78	0.9	1.2	2.0	31.6	9	7.5	811	500	R16