


PVC INSULATED AND SHEATHED FIVE - CORE Armoured aluminium mains cables 0.6/1kv

Type: NAYFY 5-core

Identification: N: Standard Cable type
A: Aluminium Conductor
Y: PVC Insulation
F: Flat steel wire armoured
Y: PVC Sheath

Application: General underground electricity supply

SPECIFICATION: BS 6346

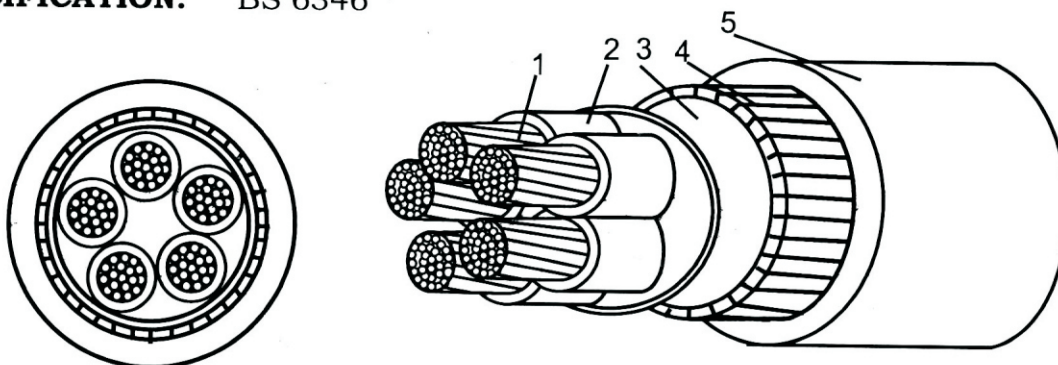

1. Aluminium conductor
2. PVC - insulation
3. Bedding (PVC)
4. Flat wire armouring
5. PVC-outer sheath

Nominal Cross Sectional Area mm ²	Conductor number x diameter of wire mm	Radial thickness of			Nominal Overall diameter mm	Maximum current rating A		Weight kg/ standard length kg	Standard delivery length m	Delivery form drum
		insult mm	inner sheath mm	outer sheath mm		in ground	in air			
16RS	7/1.70	1.0	1.2	2.0	27.2	46	41	1088	1000	R16
25RS	7/2.10	1.2	1.2	2.0	31.8	59	53	727	500	R16
35RS	7/2.52	1.2	1.5	2.2	36.0	71	63	1045	500	R16
50RS	19/1.78	1.4	1.5	2.2	40.6	85	77	1298	500	R18
70RS	19/2.14	1.4	1.8	2.2	46.1	103	98	1680	500	R20