


PVC INSULATED AND SHEATHED NON - ARMoured COPPER CONTROL MAINS CABLES 0.6/1kV WITH NUMBERED CORES

Type: NCYY -cc 4mm²

Identification: N: Standard Cable type
C: Copper conductor
Y: PVC Insulation
Y: PVC Sheath
cc: Control cable

Application: Indoor and Outdoor electricity supply

SPECIFICATION: VDE 0271

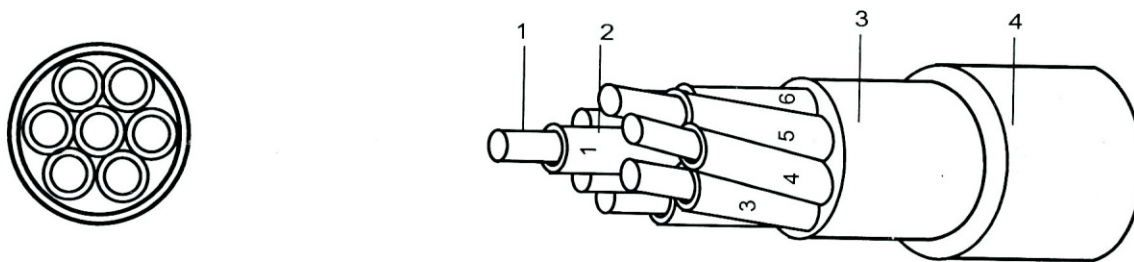

- 1. Copper conductor
- 2. PVC - insulation
- 3. PVC inner sheath
- 4. PVC-outer sheath

Nominal Cross Sectional Area mm ²	Conductor number x diameter of wire mm	Radial thickness of			Nominal Overall diameter mm	Maximum current rating A		Weigh kg/ standard length kg	Standard delivery length m	Delivery form drum
		insult mm	inner sheath mm	outer sheath mm		in ground	in air			
5 x 4	1/2.25	1.0	0.8	1.8	16.8	27	21	427	1000	R12
7 x 4	1/2.25	1.0	0.8	1.8	18.1	23	18	532	1000	R12
10 x 4	1/2.25	1.0	1.2	1.8	23.2	19	15	774	1000	R14
12 x 4	1/2.25	1.0	1.2	1.8	24.1	18	15	885	1000	R14
16 x 4	1/2.25	1.0	1.2	2.0	26.2	16	13	1145	1000	R14
19 x 4	1/2.25	1.0	1.2	2.0	27.9	15	13	1303	1000	R16
27 x 4	1/2.25	1.0	1.5	2.0	33.7	13	11	911	500	R16