


PVC INSULATED AND SHEATHED ARMoured COPPER CONTROL MAINS CABLES 0.6 /1 Kv WITH NUMBERED CORES

Type: NCYRY /FY -cc 4mm²

Identification: N: Standard Cable type
C: Copper conductor
Y: PVC Insulation
R: Round Steelwire armoured, or
F: Flat steel armoured
Y: PVC outer sheath
cc: Control cable

Application: Indoor and Outdoor electricity supply

SPECIFICATION: VDE 0271

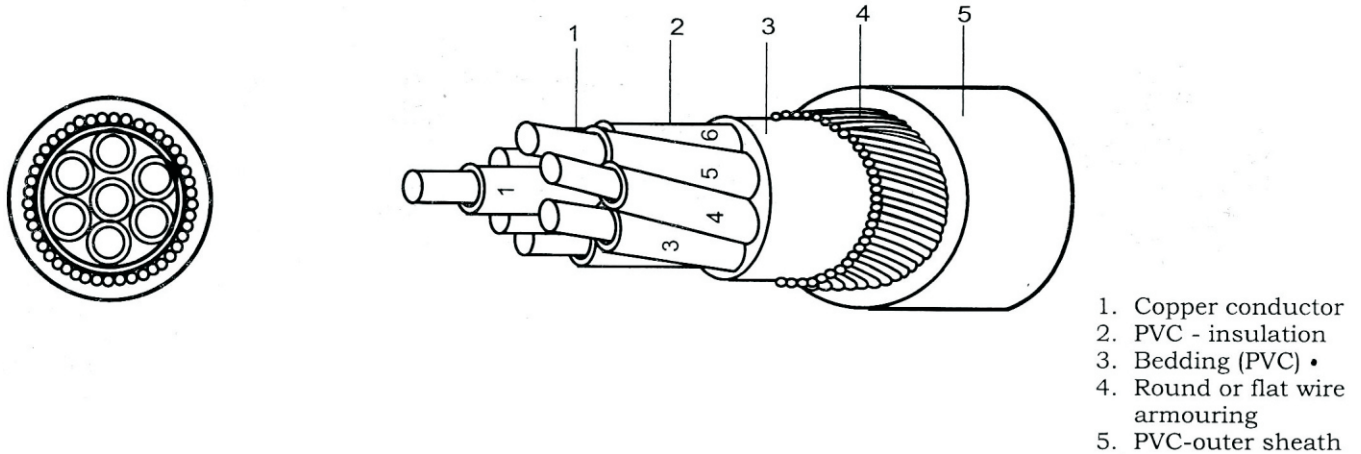

Nominal Cross Sectional Area mm ²	Conductor number x diameter of wire mm	Radial thickness of			Nominal Overall diameter mm	Maximum current rating A		Weigh kg/ standard length kg	Standard delivery length m	Delivery form drum
		insult mm	inner sheath mm	outer sheath mm		in ground	in air			
5 x 4	1/2.25	1.0	0.8	1.8	19.3	27	21	780	1000	R12
7 x 4	1/2.25	1.0	1.2	1.8	21.7	23	18	959	1000	R14
10 x 4	1/2.25	1.0	1.2	2.0	25.2	19	15	1130	1000	R14
12 x 4	1/2.25	1.0	1.2	2.0	26.1	18	15	1269	1000	R14
16 x 4	1/2.25	1.0	1.2	2.0	28.2	16	13	1533	1000	R16
19 x 4	1/2.25	1.0	1.2	2.0	29.5	15	13	1718	500	R16
27 x 4	1/2.25	1.0	1.2	2.2	35.1	13	11	1149	500	R14